




POT BURNER. - for easy starting.

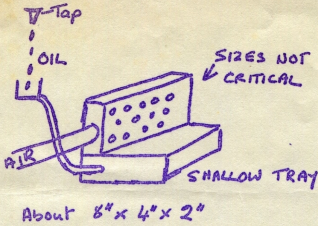

ATOMISING BURNER

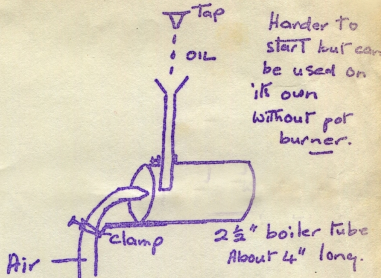

Brick chimney To 8'
Ken 7"-8" diameter
Copper or iron.

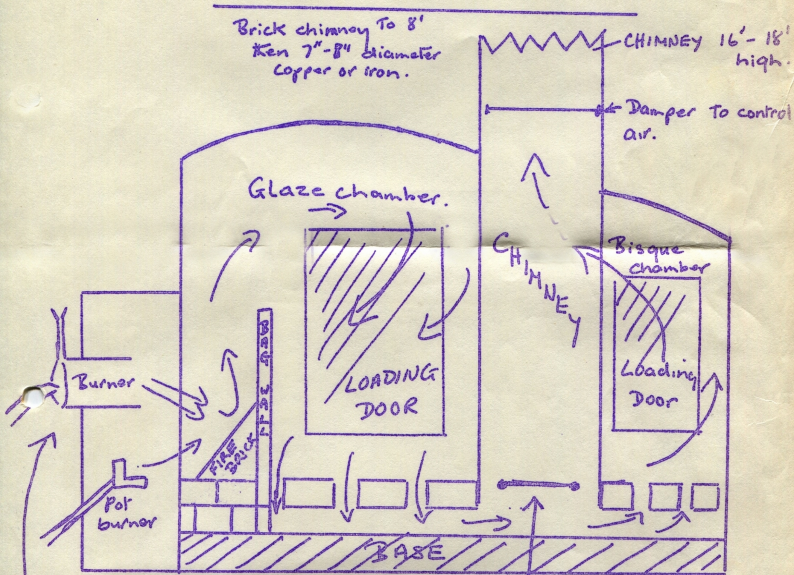


point this burner down to base of bay wall - fire brick cut on angle protects bay wall

moveable damper for use when bisque chamber not in use.

AIR → SHALLOW TRAY

About 8" x 4" x 2"

clamp
2 1/2" boiler tube
About 4" longy.

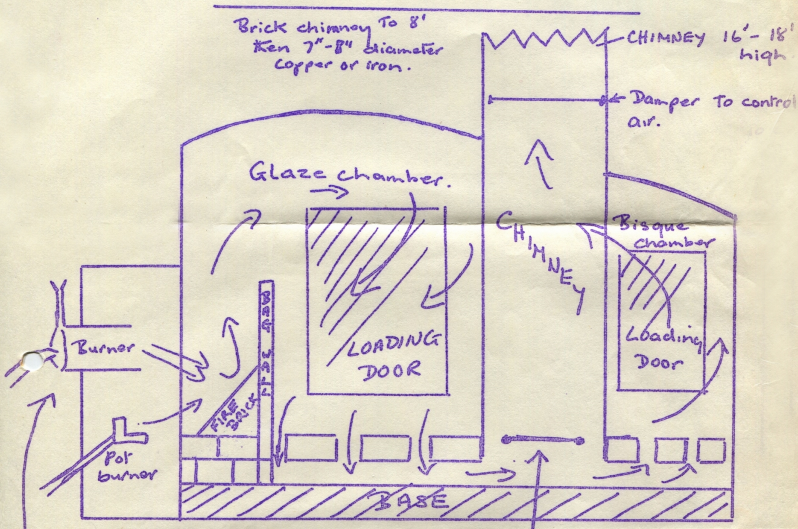

Brick chimney To 8'
Ken 7"-8" diameter
Copper or iron.

CHIMNEY 16'-18'
high

Damper To control
air.

Glaze chamber.

LOADING
DOOR

CHIMNEY

Bisque
chamber

LOADING
DOOR

BASE

point this burner down to
base of bag wall - fire brick
cut on angle protects bag wall
from flame damage.

moveable damper
for use when bisque
chamber not in use.

Note arrows denote circulation.

Rough sketch of Estelles kiln which fires to Δ II.
Burners - air run from household vacuum cleaner.